



DHN-66Z20/DG/FS(BW) 640~670W

Full-Screen Double Glass PV Module

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001

2018/International standards for occupational health & safety

ISO 14001

2015/Standards for environmental management system

ISO 9001

2015/Quality management system

Certified Through DERKA Wind Tunnel Testing

15 Material & technology warranty

30 Linear power output warranty

 Double-glass with no solder point and mesh interconnection to resist virtual soldering & hidden cracks.

 Global patented Full-Screen anti-dust technology prevents dust accumulation in both horizontal & vertical installations.

 PIB - enhanced insulation withstands over 2000V, offering superior performance.


 Triple-sealing provides long-term protection for solar cells against moisture corrosion.

 System costs are effectively reduced, with higher annual power generation revenue.


 Superior installed capacity and revenue, reduce land usage for the same installed capacity.

DHN-66Z20/DG/FS(BW) 640~670W

Design

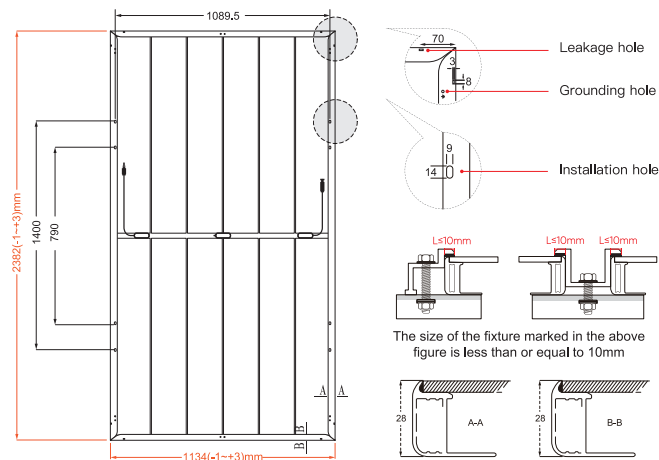

30-Year Linear Power Output Warranty

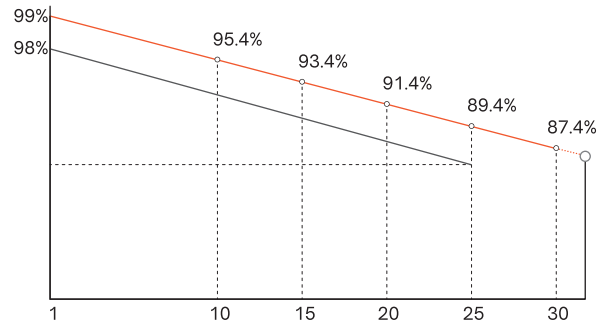

— DAH Solar linear power output guarantee
— Standard linear power output guarantee

Mechanical Specification

No. of Cells	132 (6×22)
Weight	32.2kg
Dimension (L×W×T)	2382(-1~+3)×1134(-1~+3)×28mm
Packing	37pcs/Pallet, 740pcs/40HQ

Cable(Including connector)	4.0mm ² , 300/200mm in length, length can be customized
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

Electrical Characteristics

Module Type	DHN-66Z20/DG/FS(BW)											
Test conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P _{max} /W)	640	481	645	485	650	489	655	493	660	496	665	500
Open-circuit Voltage (V _{oc} /V)	48.6	46.2	48.7	46.3	48.8	46.4	48.9	46.5	49.0	46.6	49.1	46.6
Maximum Power Voltage (V _{mp} /V)	41.5	39.4	41.6	39.5	41.7	39.6	41.8	39.7	41.9	39.8	42.0	39.9
Short-circuit Current (I _{sc} /A)	16.34	13.19	16.38	13.22	16.42	13.26	16.46	13.29	16.50	13.32	16.54	13.35
Maximum Power Current (I _{mp} /A)	15.42	12.21	15.50	12.27	15.59	12.34	15.67	12.40	15.75	12.47	15.83	12.53
Module Efficiency - STC (%)	23.69		23.88		24.06		24.25		24.43		24.62	
Power Tolerance	0~5W											
Refer Bifacial Factor	80±5%											

STC-Standard Test Environment: Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5
NOCT-Standard Test Environment: Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s
Note: The electrical data in this catalog only serve for comparison among different module type.
They do not refer to any individual module and they are not part of the offer.

Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (P _{max})	672	677	683	688	693	698	704
	Module Efficiency (%)	24.9	25.1	25.3	25.5	25.7	25.8	26.0
15%	Maximum Power (P _{max})	736.0	741.8	747.5	753.3	759.0	764.8	770.5
	Module Efficiency (%)	27.2	27.5	27.7	27.9	28.1	28.3	28.5
25%	Maximum Power (P _{max})	800.0	806.3	812.5	818.8	825.0	831.3	837.5
	Module Efficiency (%)	29.6	29.8	30.1	30.3	30.5	30.8	31.0

Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of I _{sc} (also)	0.046%/°C
Temperature Coefficient of V _{oc} (βV _{oc})	-0.25%/°C
Temperature Coefficient of P _{max} (γP _{mp})	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa



Add: No.1 Yaoyuan Road, Luyang District, Hefei City, Anhui, China
Ins: <https://www.instagram.com/dahsolarpv/>
E-mail: sales@dahsolar.com
All specific descriptions involving technical modifications and testing conditions shall be subject to the final interpretation authority of DAH Solar